

1: GLAZING MATERIAL

INNER      OUTER

ACRYLIC DOME           

POLYCARBONATE DOME           

2: GLAZING COLOR

CLEAR           

BRONZE           

WHITE           

OTHER      \_\_\_\_\_     

3: FRAME FINISH

MILL     

BRONZE ANODIZED     

CLEAR ANODIZED     

CUSTOM COLOR      \_\_\_\_\_     

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)     

30 DEGREE (1/2 WIDTH X .577)     

40 DEGREE (1/2 WIDTH X .839)     

FOR SELF FLASHING SKYLIGHTS PROVIDE  
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION


QTY:      R.O. =      X

QTY:      R.O. =      X

QTY:      R.O. =      X

QTY:      R.O. =      X

QTY:      R.O. =      X

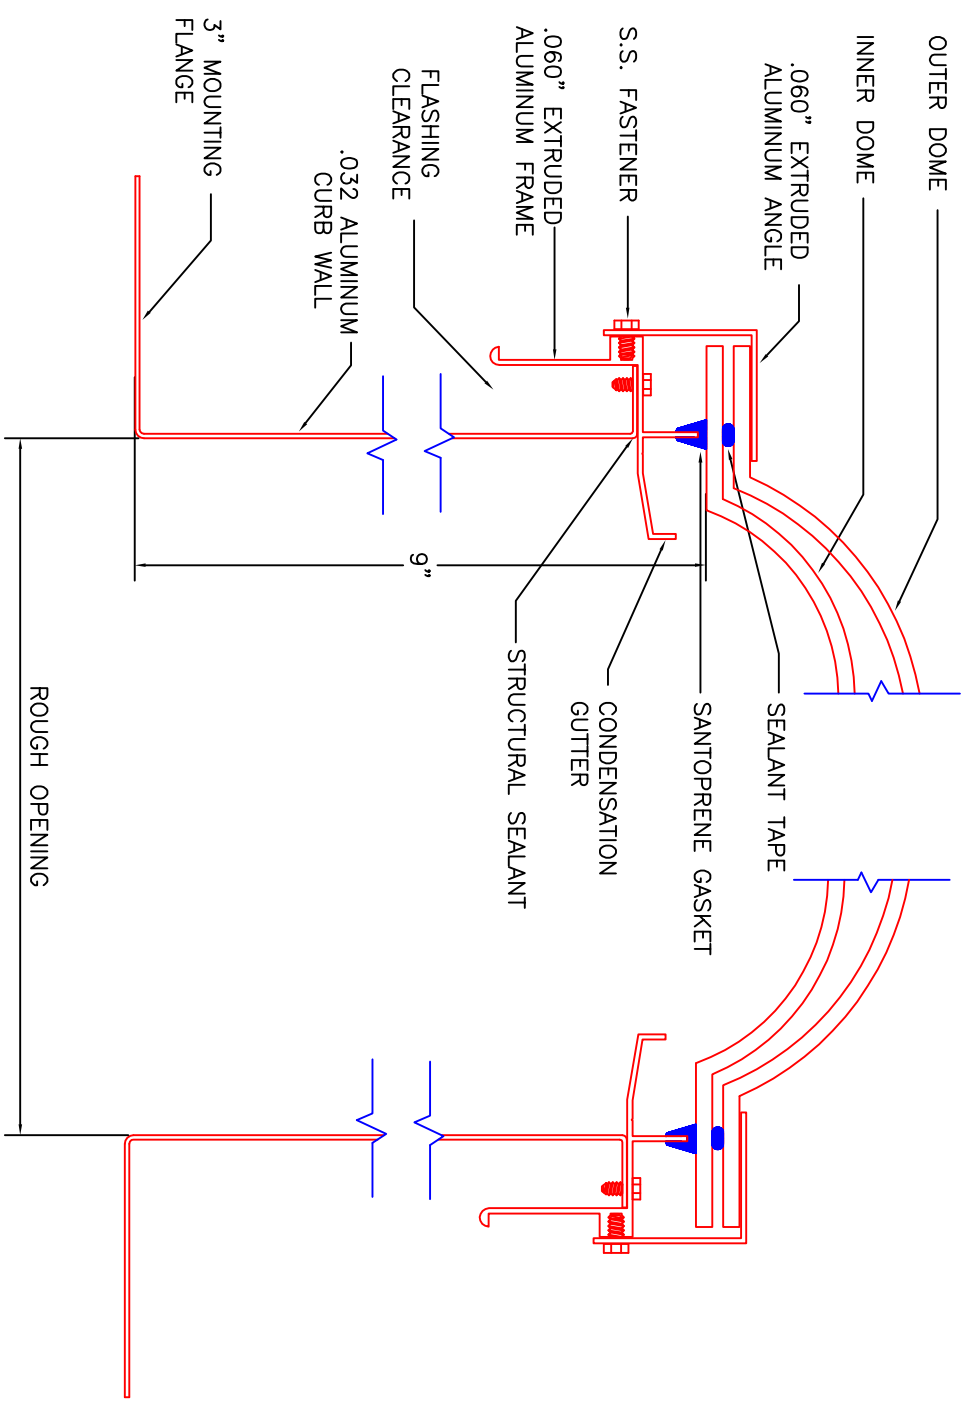

## 9" STANDARD SELF FLASHING



**AMERICAN SKYLITES**  
525 113th STREET ARLINGTON, TEXAS 76011  
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E531 UNIFORM LOAD ASTM E330	TEST PRESSURE 15.0 PSF POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	NO LEAKAGE 60.0 PSF MIN 40.0 PSF MIN