

1: GLAZING MATERIAL

INNER OUTER

ACRYLIC DOME    
 POLYCARBONATE DOME

2: GLAZING COLOR

CLEAR    
 BRONZE  N/A   
 WHITE    
 OTHER \_\_\_\_\_

3: FRAME FINISH


MILL \_\_\_\_\_   
 BRONZE ANODIZED \_\_\_\_\_   
 CLEAR ANODIZED \_\_\_\_\_   
 CUSTOM COLOR \_\_\_\_\_

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)   
 30 DEGREE (1/2 WIDTH X .577)   
 40 DEGREE (1/2 WIDTH X .839)

FOR CURB MOUNT SKYLIGHTS PROVIDE  
 OUTSIDE DIMENSION OF FINISHED CURB

QTY: O.D. CURB= X  
 QTY: O.D. CURB= X  
 QTY: O.D. CURB= X  
 QTY: O.D. CURB= X  
 QTY: O.D. CURB= X

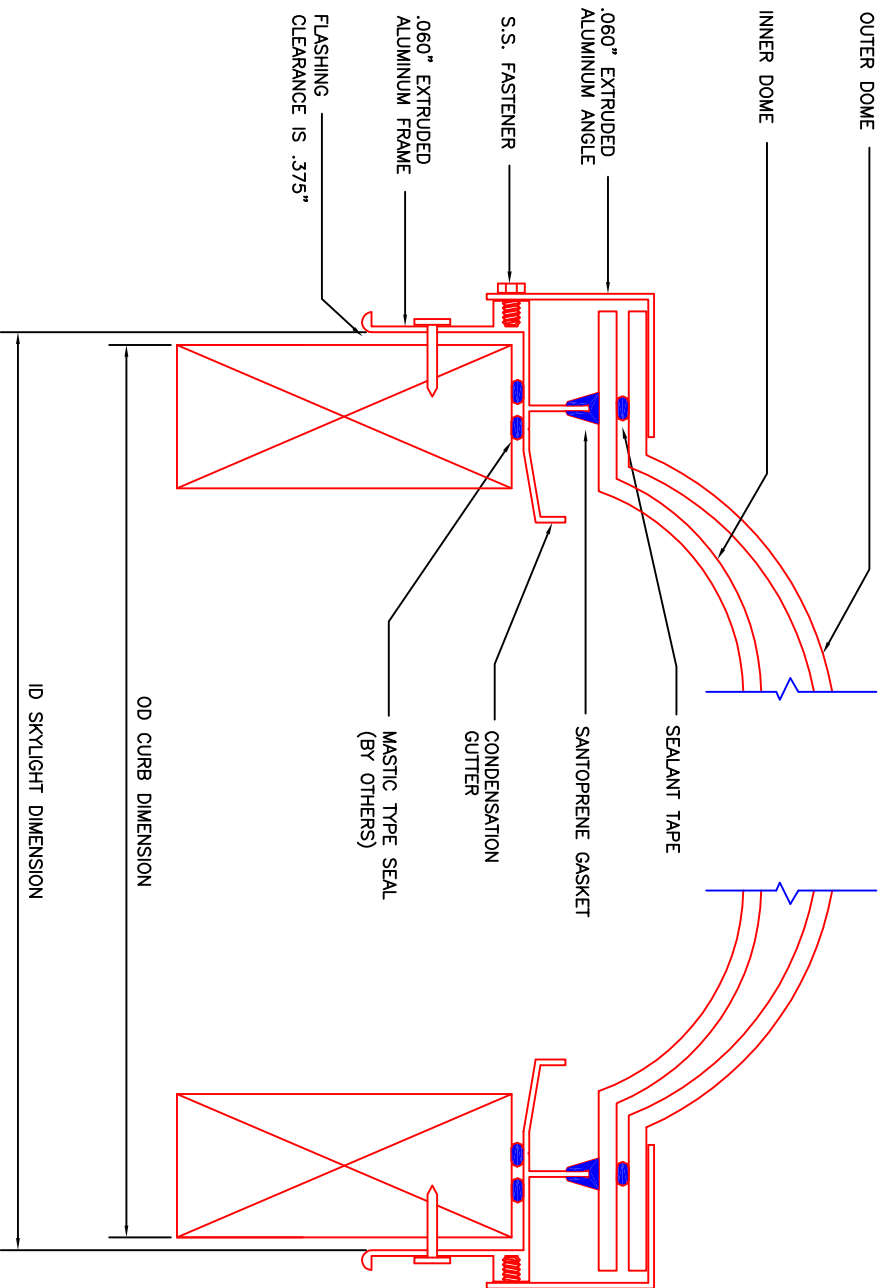

CURB MOUNT



**AMERICAN SKYLITES**  
 525 113th STREET ARLINGTON, TEXAS 76011  
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330		60.0 PSF MIN 40.0 PSF MIN