


- 1: GLAZING MATERIAL
- | | | | | | |
|-------------------------|--------------------------|-------|--------------------------|-------|--------------------------|
| TEMPERED | <input type="checkbox"/> | INNER | <input type="checkbox"/> | OUTER | <input type="checkbox"/> |
| LAMINATED | <input type="checkbox"/> | | | | <input type="checkbox"/> |
| TEMPERED & LAMINATED | <input type="checkbox"/> | | | | <input type="checkbox"/> |
| OVERALL GLASS THICKNESS | | 3/4" | <input type="checkbox"/> | | <input type="checkbox"/> |
| | | 1" | <input type="checkbox"/> | | <input type="checkbox"/> |

- 2: GLAZING COLOR
- | | | | |
|-----------|--------------------------|-----|--------------------------|
| CLEAR | <input type="checkbox"/> | | <input type="checkbox"/> |
| BRONZE | <input type="checkbox"/> | N/A | <input type="checkbox"/> |
| LOW "E" | <input type="checkbox"/> | | <input type="checkbox"/> |
| ARGON GAS | <input type="checkbox"/> | | <input type="checkbox"/> |

- 3: FRAME FINISH
- | | |
|-----------------|--------------------------|
| MILL | <input type="checkbox"/> |
| BRONZE ANODIZED | <input type="checkbox"/> |
| CLEAR ANODIZED | <input type="checkbox"/> |
| CUSTOM COLOR | <input type="checkbox"/> |

FOR CURB MOUNT SKYLIGHTS PROVIDE
OUTSIDE DIMENSION OF FINISHED CURB

- | | | |
|------|------------|---|
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |

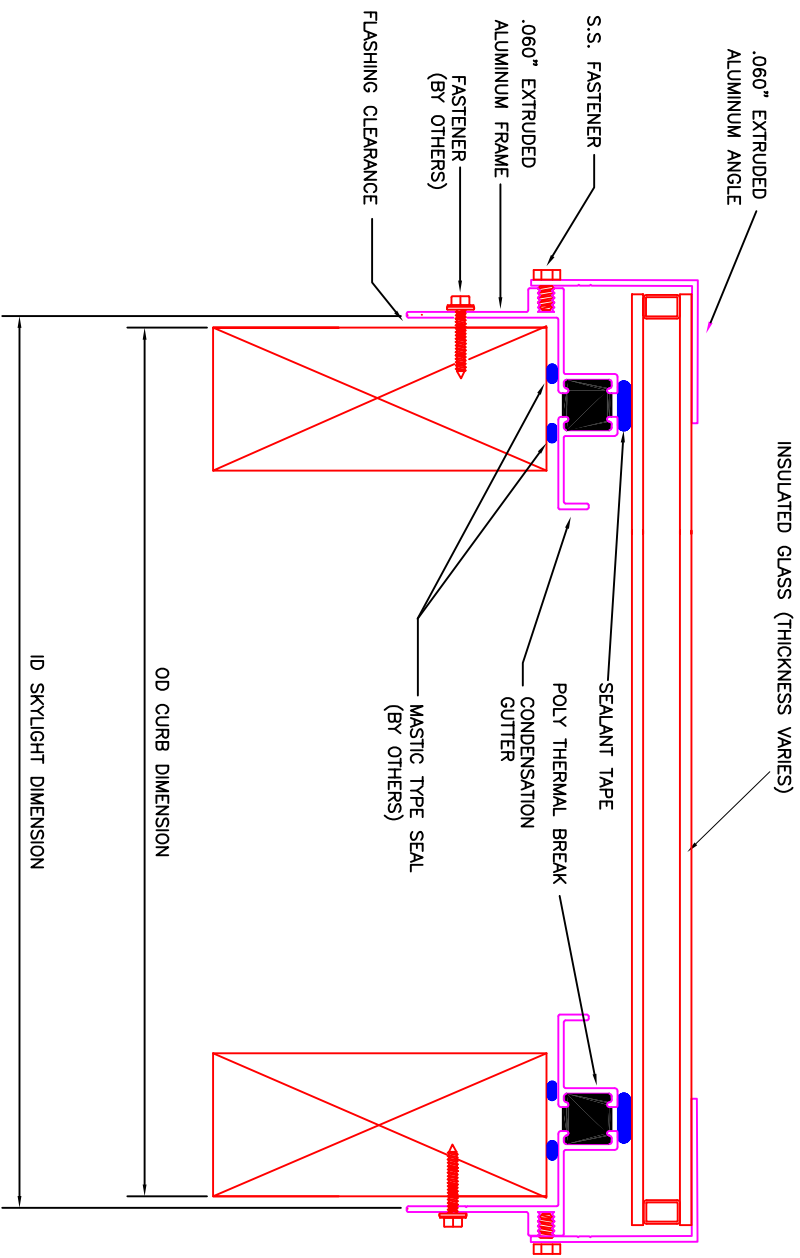

GLASS THERMALLY BROKEN FIXED CURB MOUNT

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES
525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331 UNIFORM LOAD ASTM E330	TEST PRESSURE 15.0 PSF POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	NO LEAKAGE 60.0 PSF MIN 40.0 PSF MIN