

- 1: GLAZING MATERIAL
- | | | | | | |
|--------------------|--------------------------|-------|--------------------------|-------|--------------------------|
| ACRYLIC DOME | <input type="checkbox"/> | INNER | <input type="checkbox"/> | OUTER | <input type="checkbox"/> |
| POLYCARBONATE DOME | <input type="checkbox"/> | | <input type="checkbox"/> | | <input type="checkbox"/> |
- 2: GLAZING COLOR
- | | | | |
|-------------|--------------------------|-----|--------------------------|
| CLEAR | <input type="checkbox"/> | N/A | <input type="checkbox"/> |
| BRONZE | <input type="checkbox"/> | | <input type="checkbox"/> |
| WHITE | <input type="checkbox"/> | | <input type="checkbox"/> |
| OTHER _____ | | | |
- 3: FRAME FINISH
- | | |
|--------------------|--------------------------|
| MILL | <input type="checkbox"/> |
| BRONZE ANODIZED | <input type="checkbox"/> |
| CLEAR ANODIZED | <input type="checkbox"/> |
| CUSTOM COLOR _____ | |

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
- 30 DEGREE (1/2 WIDTH X .577)
- 40 DEGREE (1/2 WIDTH X .839)

5: BAY CONFIGURATION

OF BAYS WIDTH = _____

OF BAYS LENGTH (SLOPE) = _____

GRID SYSTEM

*PROVIDE THE OVERALL OUTSIDE DIMENSION OF THE FINISHED CURB.


*GRID SYSTEMS SHIPPED AS MULTIPLE TANDEM SYSTEMS FOR PARTIAL FIELD ASSEMBLY.

*STRUCTURAL MULLION COVER & GUTTER ASSEMBLY SHIPPED LOOSE.

*STRUCTURAL MULLION MIN SLOPE = 1/12.

*#5 BAY CONFIGURATION MUST BE COMPLETED.

*BAY DETAIL AVAILABLE UPON REQUEST.

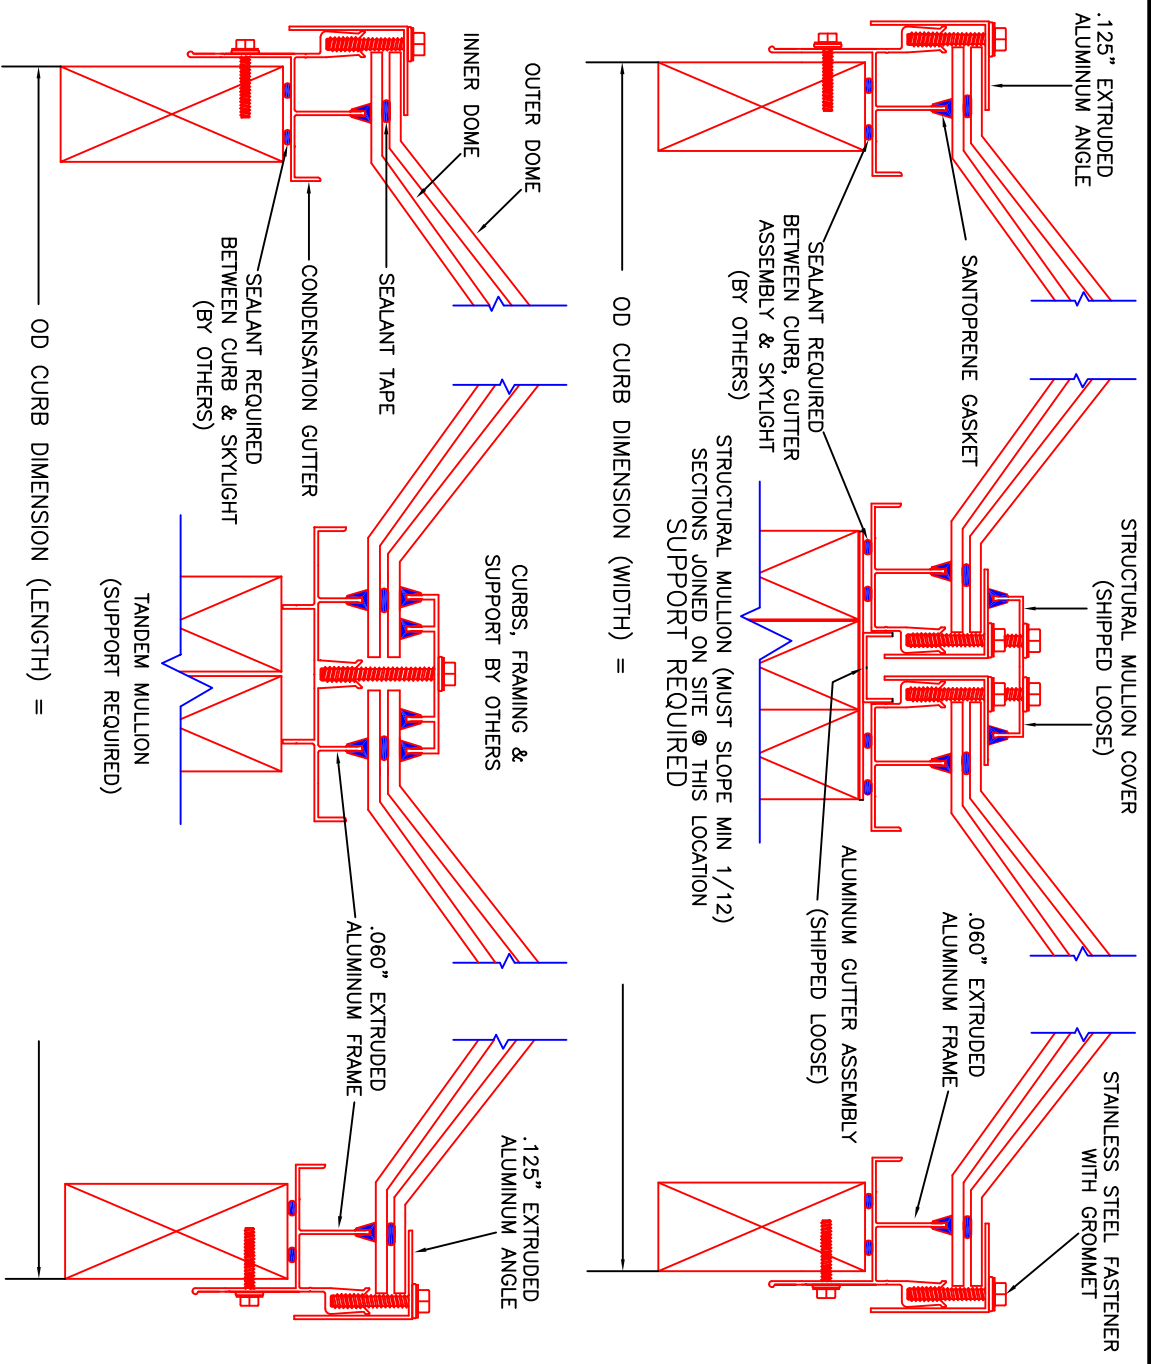

AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

TEST	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E531 UNIFORM LOAD ASTM E330	TEST PRESSURE 15.0 PSF POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	NO LEAKAGE 60.0 PSF MIN 40.0 PSF MIN