

1: GLAZING MATERIAL

INNER OUTER

POLYCARBONATE DOME

2: GLAZING COLOR

CLEAR
 BRONZE N/A
 WHITE
 OTHER

3: FRAME FINISH


MILL
 BRONZE ANODIZED
 CLEAR ANODIZED
 CUSTOM COLOR

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)
 30 DEGREE (1/2 WIDTH X .577)
 40 DEGREE (1/2 WIDTH X .839)

FOR SELF FLASHING SKYLIGHTS PROVIDE
 ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X

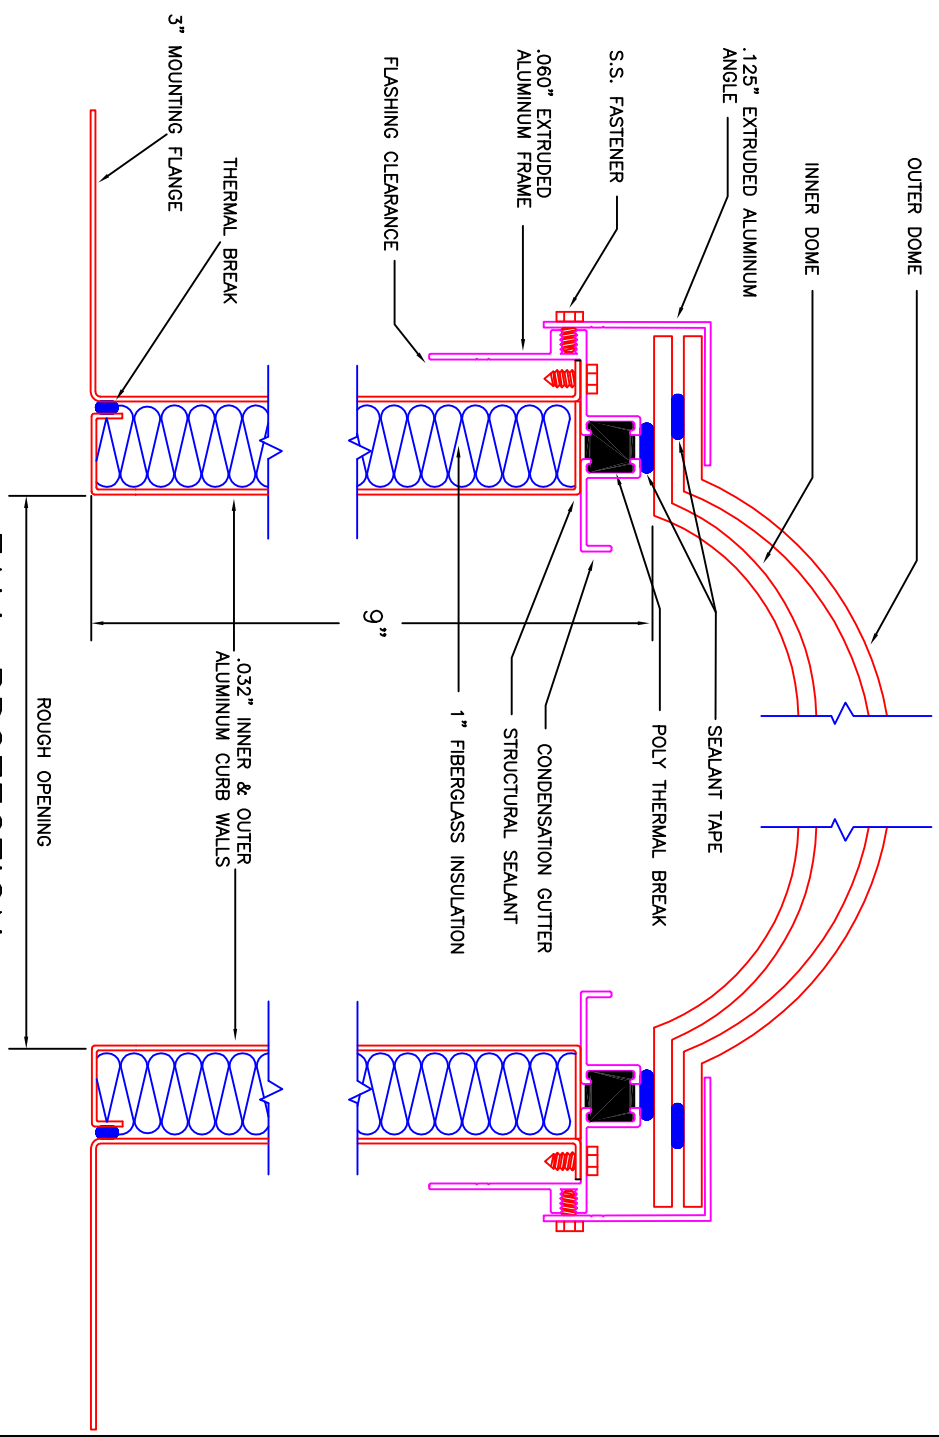

9" THERMALLY BROKEN & INSULATED SELF FLASHING



AMERICAN SKYLITES
 525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

TEST METHOD		SPECIFICATIONS	
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT	
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE	
UNIFORM LOAD IMPACT OSHA SPECIFICATIONS	POSITIVE 1200 ft./lbs	NO FAILURE	
		MEETS	MIN 775 ft./lbs