

1: GLAZING MATERIAL

POLYCARBONATE PYRAMID INNER OUTER

2: GLAZING COLOR


CLEAR
 BRONZE N/A
 WHITE
 OTHER _____

3: FRAME FINISH

MILL
 BRONZE ANODIZED
 CLEAR ANODIZED
 CUSTOM COLOR _____

FOR SELF FLASHING SKYLIGHTS PROVIDE
 ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X

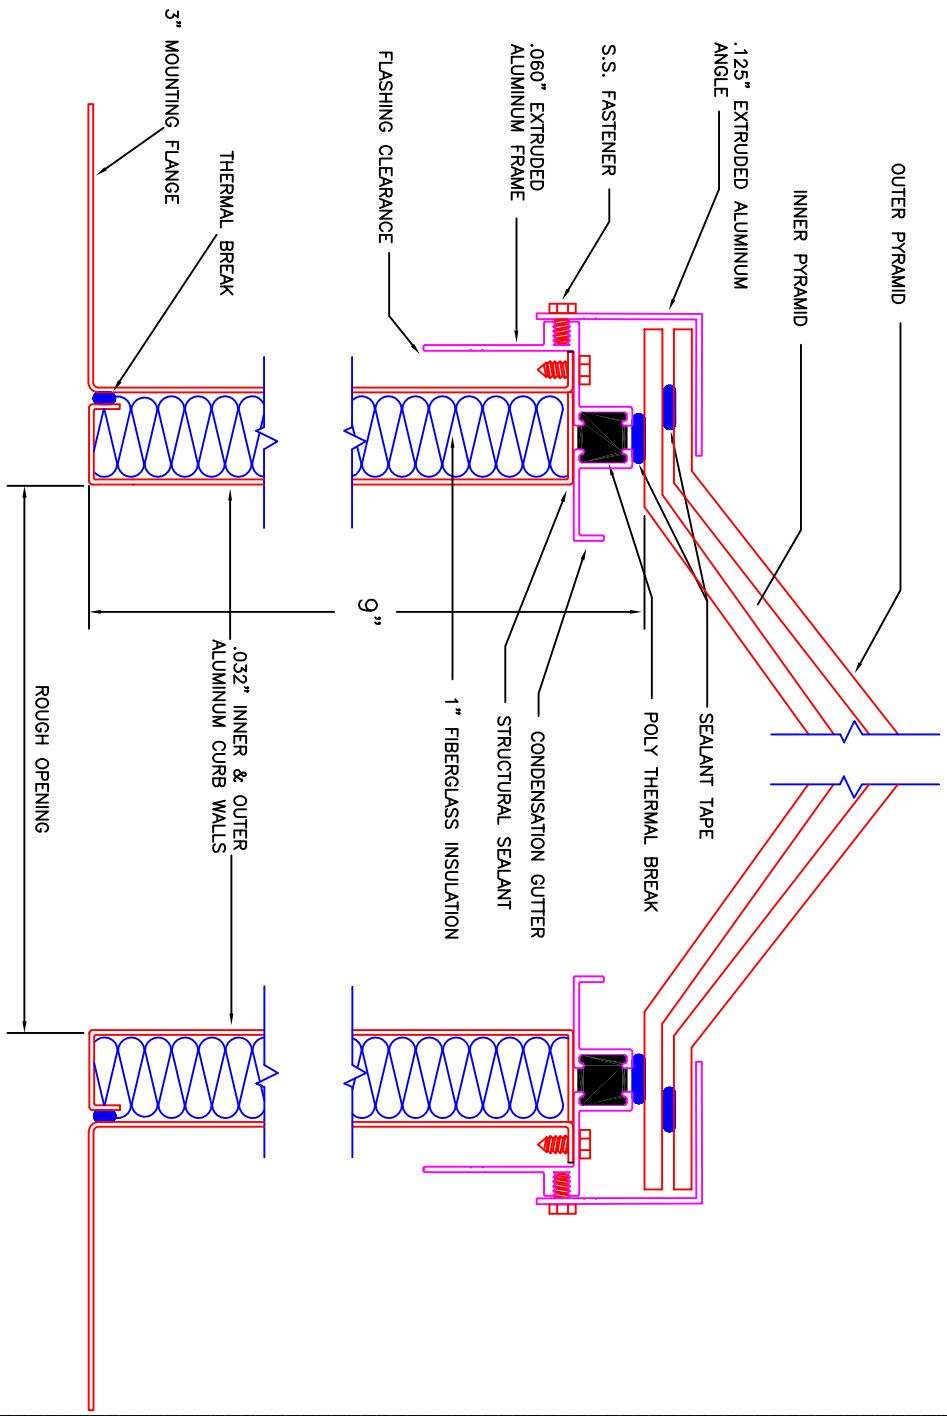

9" THERMALLY BROKEN & INSULATED SELF FLASHING



AMERICAN SKYLITES
 525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD IMPACT OSHA SPECIFICATIONS	POSITIVE 1200 ft/lbs	NO FAILURE MEETS MIN 775 ft/lbs