

1: GLAZING MATERIAL

- ACRYLIC DOME INNER OUTER
- POLYCARBONATE DOME

2: GLAZING COLOR

- CLEAR
- BRONZE N/A
- WHITE
- OTHER _____

3: FRAME FINISH


- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR _____

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
- 30 DEGREE (1/2 WIDTH X .577)
- 40 DEGREE (1/2 WIDTH X .839)

FOR CURB MOUNT SKYLIGHTS PROVIDE
OUTSIDE DIMENSION OF FINISHED CURB

- QTY: 0.D. CURB=
- QTY: 0.D. CURB=
- QTY: 0.D. CURB=
- QTY: 0.D. CURB=
- QTY: 0.D. CURB=

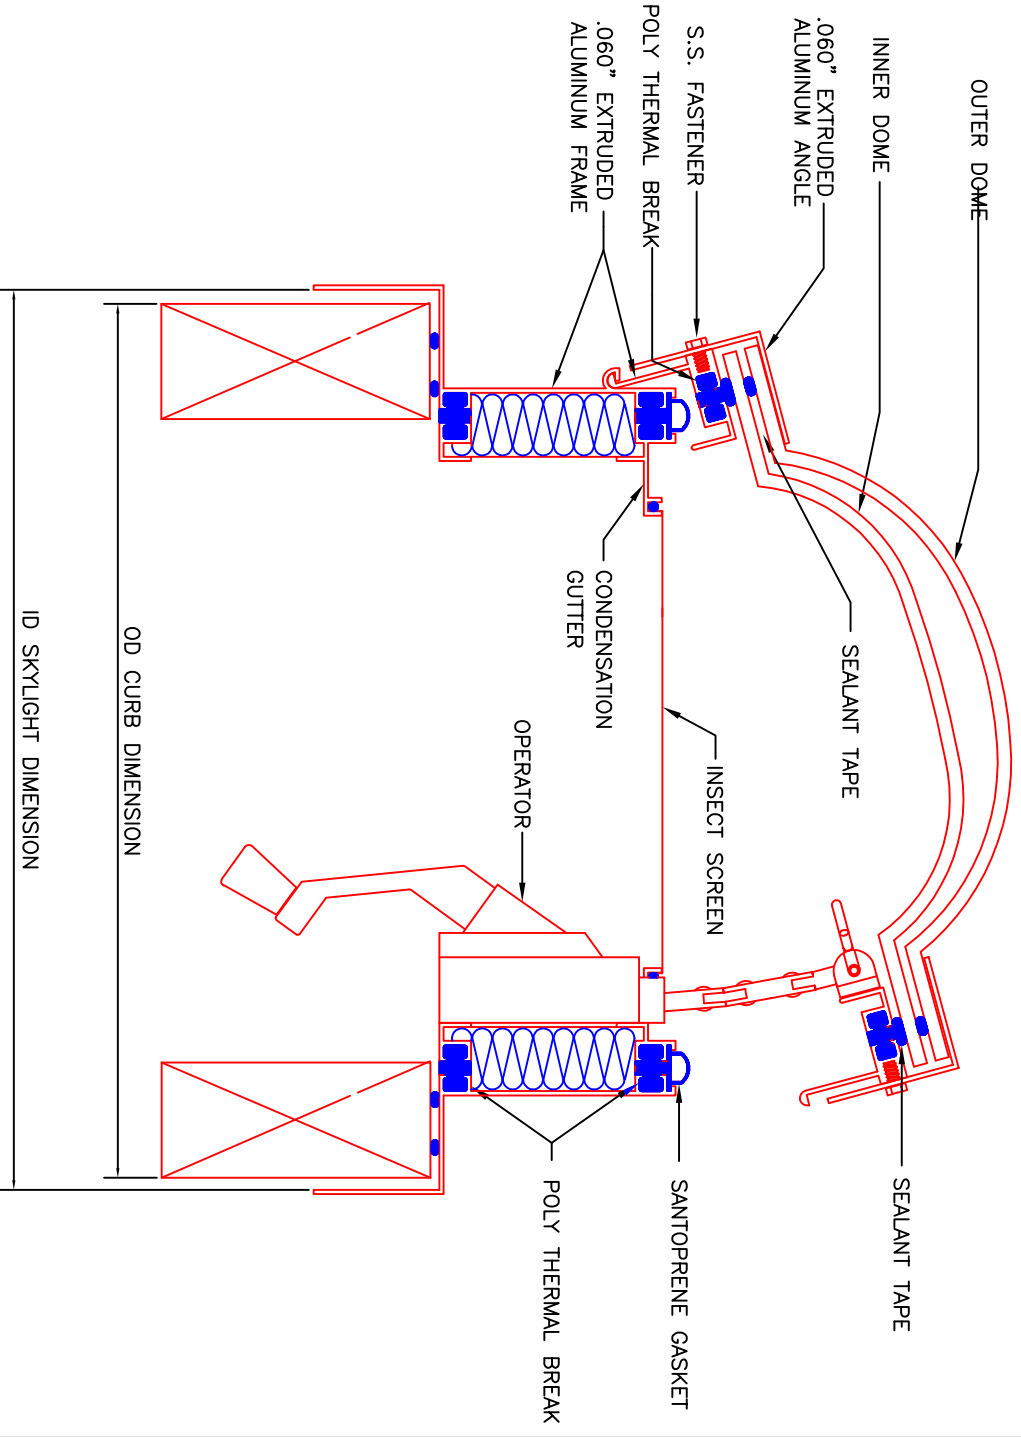

THERMALLY BROKEN & INSULATED VENTING CURB MOUNT

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

| TEST METHOD | TEST PRESSURE | ALLOWED |
|-------------------------------------|--|------------------------------|
| AIR INFILTRATION ASTM E283 | 6.24 PSF (50 MPH) | 0.03 CFM/FT |
| WATER PENETRATION ASTM E547/E331 | TEST PRESSURE 15.0 PSF | NO LEAKAGE |
| UNIFORM LOAD ASTM E330 | POSITIVE 69.0 PSF NEGATIVE 75.0 PSF | 60.0 PSF MIN 40.0 PSF MIN |