

1: GLAZING MATERIAL

INNER OUTER

- ACRYLIC DOME
 POLYCARBONATE DOME

2: GLAZING COLOR

- CLEAR
 BRONZE N/A
 WHITE
 OTHER _____

3: FRAME FINISH


- MILL
 BRONZE ANODIZED
 CLEAR ANODIZED
 CUSTOM COLOR _____

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
 30 DEGREE (1/2 WIDTH X .577)
 40 DEGREE (1/2 WIDTH X .839)

FOR SELF FLASHING SKYLIGHTS PROVIDE
 ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

- QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X
 QTY: R.O. = X

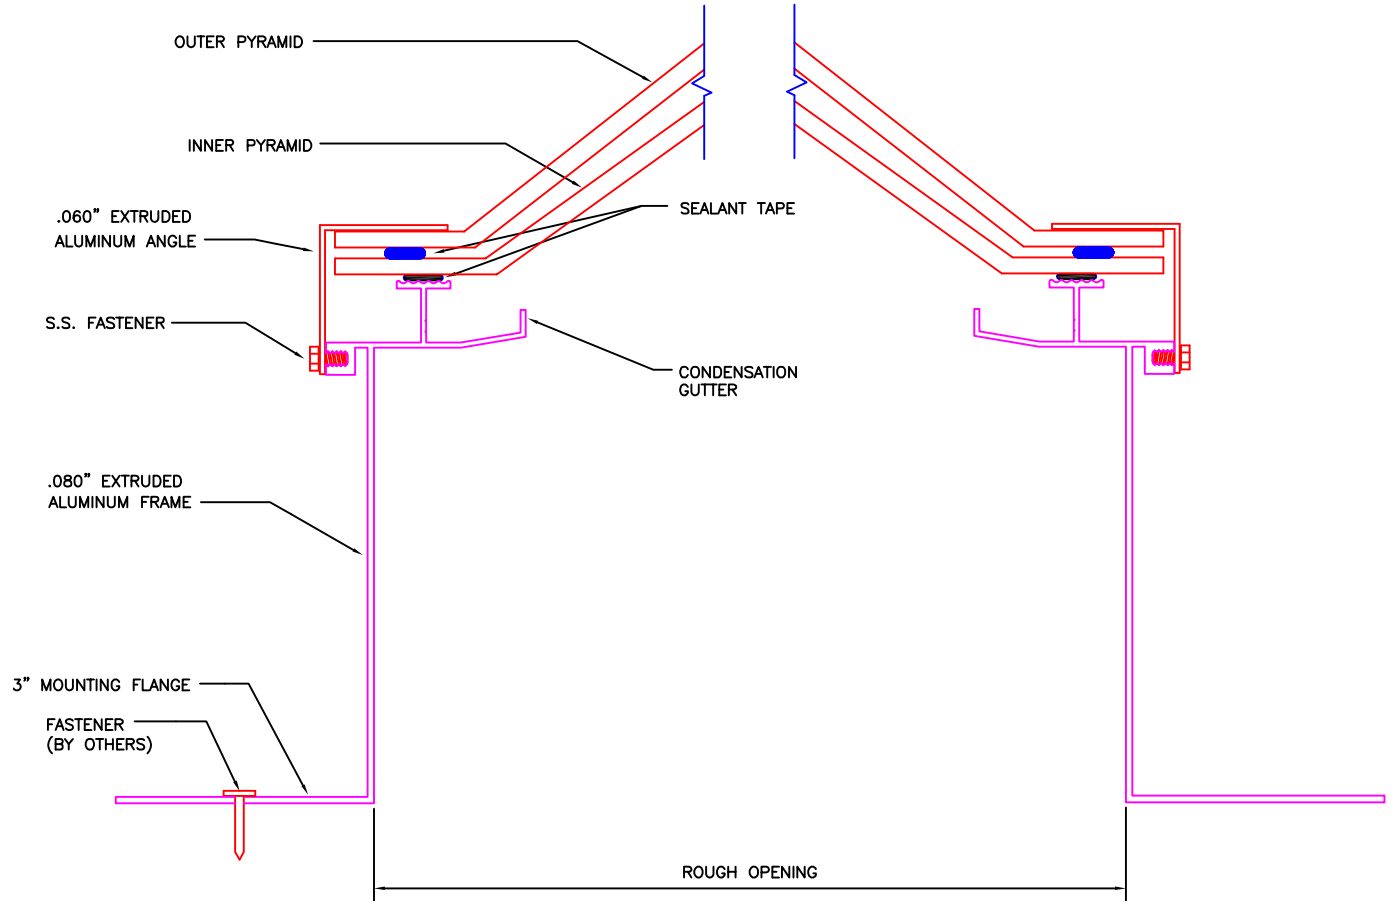

HIGH PROFILE STANDARD SELF FLASHING PYRAMID

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES
 525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN