

1: GLAZING MATERIAL

	INNER	OUTER
POLYCARBONATE DOME	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2: GLAZING COLOR

CLEAR	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	N/A	<input type="checkbox"/>
WHITE	<input type="checkbox"/>	<input type="checkbox"/>
OTHER _____		

3: FRAME FINISH

MILL	<input type="checkbox"/>
BRONZE ANODIZED	<input type="checkbox"/>
CLEAR ANODIZED	<input type="checkbox"/>
CUSTOM COLOR _____	


4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)	<input type="checkbox"/>
30 DEGREE (1/2 WIDTH X .577)	<input type="checkbox"/>
40 DEGREE (1/2 WIDTH X .839)	<input type="checkbox"/>

FOR CURB MOUNT SKYLIGHTS PROVIDE
OUTSIDE DIMENSION OF FINISHED CURB

QTY:	OD CURB =	X
QTY:	OD CURB =	X
QTY:	OD CURB =	X

OSHA (Standards-29 CFR)-1910.23(e)(8)
1200lb Impact Load

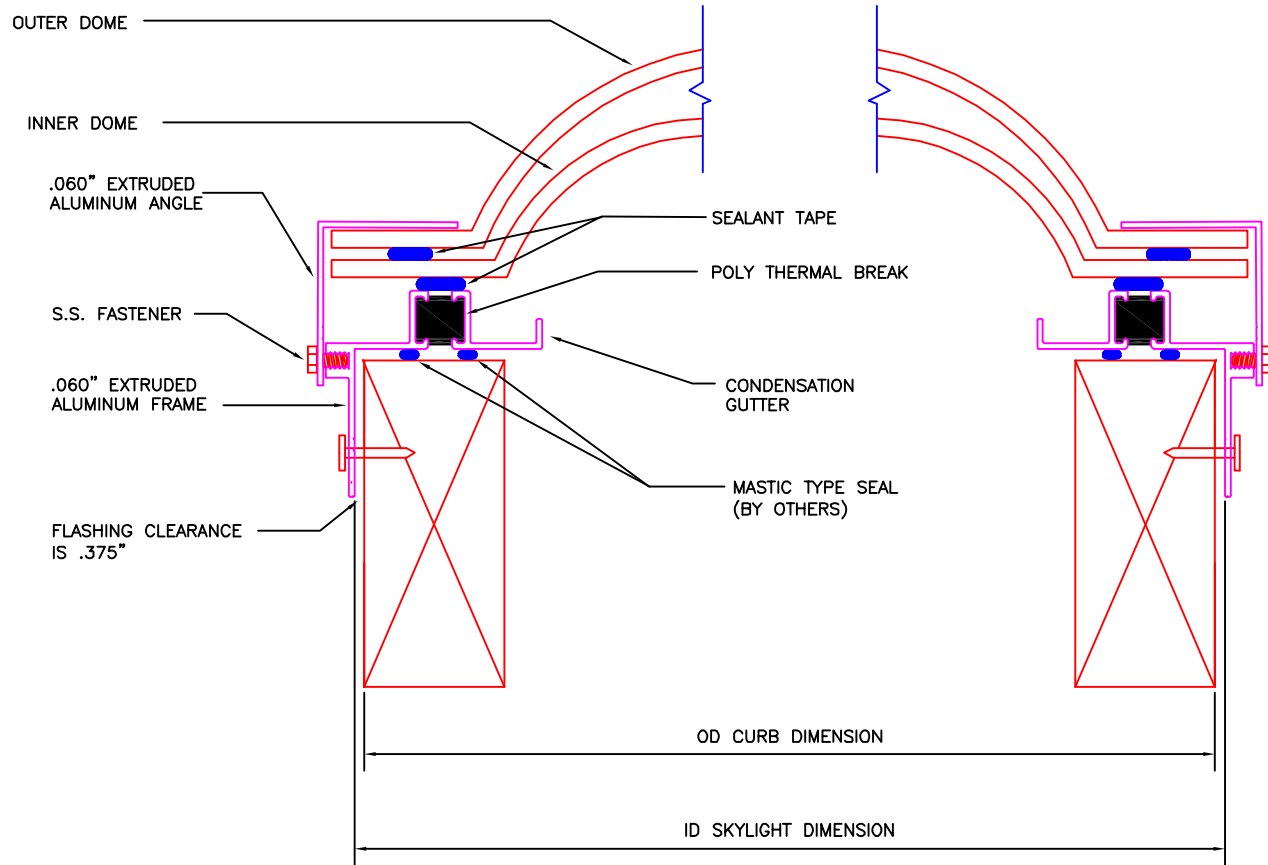

FALL PROTECTION THERMALLY BROKEN CURB MOUNT
(MODEL TCM-FG)



AMERICAN SKYLIGHTS
Phone: 855.772.7401 Fax: 855.445.7282