

1: GLAZING MATERIAL

INNER OUTER

POLYCARBONATE DOME

2: GLAZING COLOR

CLEAR    
 BRONZE  N/A   
 WHITE    
 OTHER \_\_\_\_\_

3: FRAME FINISH

MILL   
 BRONZE ANODIZED   
 CLEAR ANODIZED   
 CUSTOM COLOR \_\_\_\_\_


4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)   
 30 DEGREE (1/2 WIDTH X .577)   
 40 DEGREE (1/2 WIDTH X .839)

OSHA (Standards-29 CFR)-1910.23(e)(8)

FOR SELF FLASHING SKYLIGHTS PROVIDE  
 ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY: R.O. = X  
 QTY: R.O. = X  
 QTY: R.O. = X  
 QTY: R.O. = X  
 QTY: R.O. = X

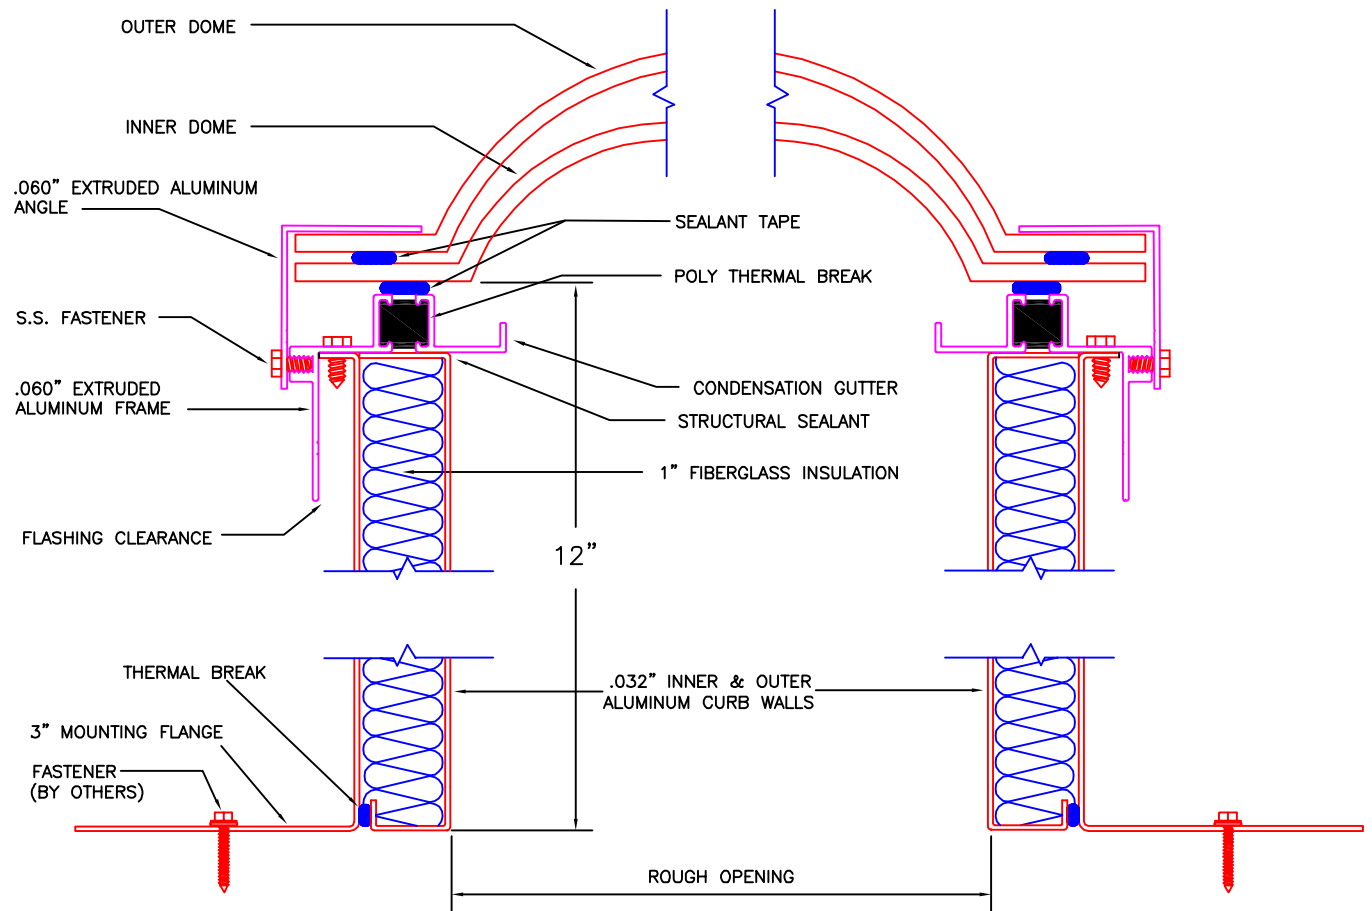

12" THERMALLY BROKEN & INSULATED SELF FLASHING  
 FALL PROTECTION RATED UNIT  
 (MODEL TSF-12-FG)



AMERICAN SKYLIGHTS  
 Phone: 855.772.7401 Fax: 855.445.7282